

Specification

- ∞ Various sizes and parts are available according to different application demand.
- ∞ Completely welded structure, firm and reliable.
- ∞ Cable in/out access at the top, bottom and rear for convenient cabling on site.
- ∞ Embedded side panel, tool free in assembling and dismantling, lock is optional.
- ∞ Front door can be dismantled and change from right to left quickly without tools, opening angle 180°, convenient for equipments installation and maintenance.
- ∞ Providing several copper grounding stud. Castor or adjustable feet is optional for fix to the ground.
- ∞ Maximum static loading is 60kgs.
- ∞ Color option, black , white gray.
- ∞ 6U ,9U,12U
- ∞ Comply with EIA-310-E, IEC297-2,DIN41491 PARTI, DIN41494 PART7.



The top heat dissipation hole, striped plate can be disassembled, easy to cabling management



Glass door all 3C certificated



Front door with security locks, easily use



The design of back panel is convenient to install the wall




Detachable side panels, can be locked.



The bottom strip can be disassembled for easily cabling management

- ① Frame
- ② Mounting Rails
- ③ Side Panel
- ④ E Door
- ⑤ C Door
- ⑥ B Door
- ⑦ A Door

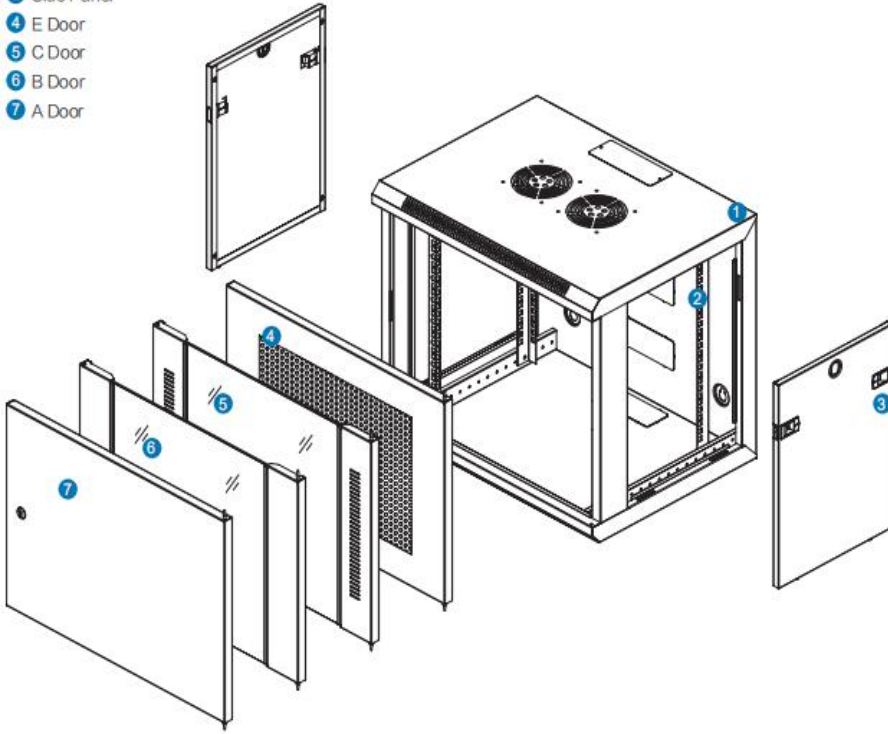

S/N	Part name	Quantity	Unit	Material	Surface finish	Remark
1	Frame	1	Piece	SPCC cold rolled steel t1.2	powder coated	---
2	Mounting beam	4	Piece	SPCC cold rolled steel t1.2	powder coated	---
3	Vertical mounting rails	4	Piece	SPCC cold rolled steel t1.5	powder coated	---
4	Front door	1	Piece	---	powder coated	---
5	Side panel	2	Piece	SPCC cold rolled steel t0.8	powder coated	---
6	Round lock	1	Piece	Zinc alloy	electroplate nickel	---
7	M6 Cage Nuts and Screws	10	set	---	---	---
8	Cage nut hook	1	Piece	---	---	---