
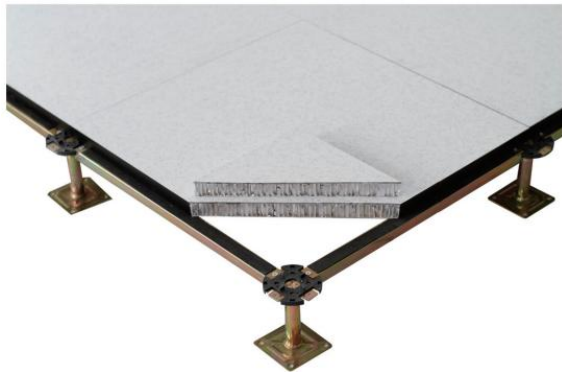



Characteristics

- 100% recycled.
- Full aluminium,die casting,top with HPL/PVC.
- Light but high loading ability,high dimension precision.
- Adjustable height for pedestal, assembly agility,large wire,good exchange ability.
- Long performance life.
- Air flow panel suitable 15%-55% ventilation.

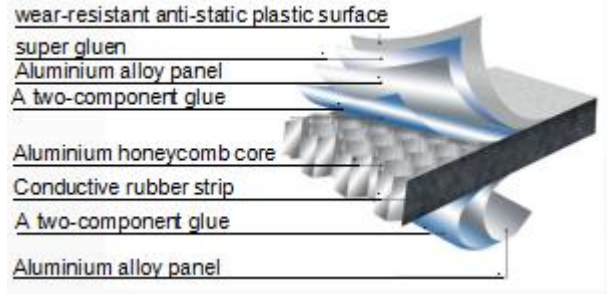

The floor of the whole weight of small,easy construction and not easy to produce dust,butter environmental protection.

The aluminium honeycomb core comprises a plurality of cross sections of a hexagonal column type through hole.

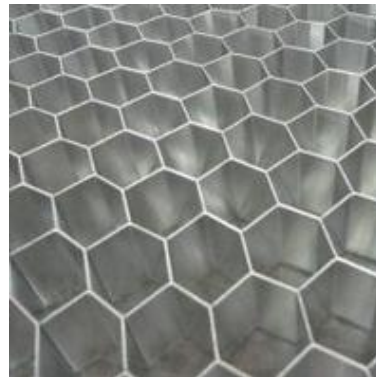

Technical Specification

Type International	Concentrated load			Impact load N	Ultimate load N	Uniform load N/m ²	Rolling load	
	LB	N	KG				10 times	10000 times
FS1000	≥1000	≥4450	≥301	≥670	≥13350	≥23000	≥4450	≥3560
FS1250	≥1250	≥5560	≥363	≥670	≥16680	≥33000	≥5580	≥4450
FS1500	≥1500	≥6560	≥453	≥780	≥26690	≥43000	≥6670	≥5560