

## 47U 600X1100X2280 NETWROK CABINET

## **Specification**

standard mounting holes with adjustable dimension.

 SLift off side panel with slam latches for easy removal.

cs180 degrees tempered glass swing door for wider opening and easy access.

Aligh quality powder coated.

Various optional accessories.

GTop and bottom with cable entry.

ശAdjustable feet.

ശ്ദColor option, black , white gray.

cs47U, 600x1100x2280, max static loading 800kg.

c3Comply with EIA-310-E, IEC297-2, DIN41491 PARTI, DIN41494 PART7.





Several cable input panels meets different location cable routing request.



Trapezoid section mounting beam



Detachable side panels, can be locked.



Quick opening latch structure, reversible door. The opening angle of the cabinet door is greater than 180 degrees.



Spring Lock



U height indicator vertical rail.



Adjustable steel tray, 150kg maximum loading capacity




Fan units for dissipate heat



Moveable bottom panel for easy cable management



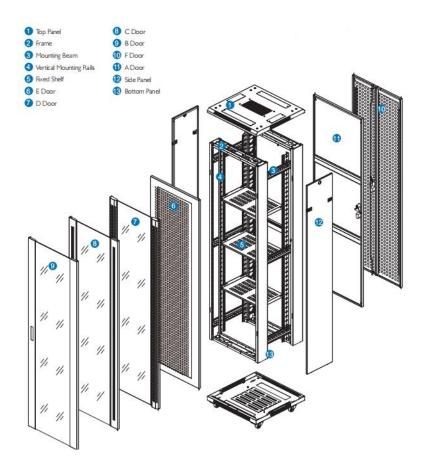



S/N	Part name	Quantity	Unit	Material	Surface finish	Remark
F	Top panel	1	Piece	SPCC cold rolled steel t1.2	powder coated	
2	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	powder coated	
3	Frame	2	Piece	SPCC cold rolled steel t1.2	powder coated	
4	Mounting beam	6	Piece	SPCC cold rolled steel t1.5	powder coated	4pcs for lower 37U
5	Vertical mounting rails	4	Piece	SPCC cold rolled steel t2.0	powder coated	
6	Front door	1	Piece		powder coated	
7	Rear door	1	Piece		powder coated	
8	Side panel	2	Piece	SPCC cold rolled steel t1.2	powder coated	
9	Spring lock	2	Piece	Zinc alloy	Black	With 2 keys
10	Fixed shelf	3	Piece	SPCC cold rolled steel t1.2	powder coated	I pcs for lower 37U
1.1	Heavy duty castor	4	Piece			2"
12	M12 adjustable feet	4	Piece			
13	Fan unit	4	Piece	nu-un		Depth of 600 mm,2 pieces
14	8 outlet standard socket	1	Piece			
15	M6 Cage Nuts and Screws	40	Set			20sets for lower 37U
16	Floating nut hook	1	Piece	·——		
17	Allen Key	1	Piece			