

## Specification

### STANDARD

Comply with EIA-310-E, IEC297-2, DIN41491 PART I, DIN41494 PART7, GB/T3047.2-92 standard, compatible with ETSI standard.

### FEATURES


- Modular design, easy to mounting and dismantle for saving cost
  - Knock down package to lower down transport cost
  - With grounding device
  - Parts are optional, such as cable trough, cable management rail
- Surface treatment procedure is degreasing-->pickling-->anti-rust and phosphorization-->water cleaning-->powder coating, RoHS compliant.

### LOADING CAPACITY

- Static loading capacity 300kg (should be uniformly loaded and fixed onto ground)

### MAIN MATERIAL

- SPCC cold rolled steel;
- Thickness for rail 2.7mm, thickness for upper beam 3.2mm, thickness for lower beam 5.2mm

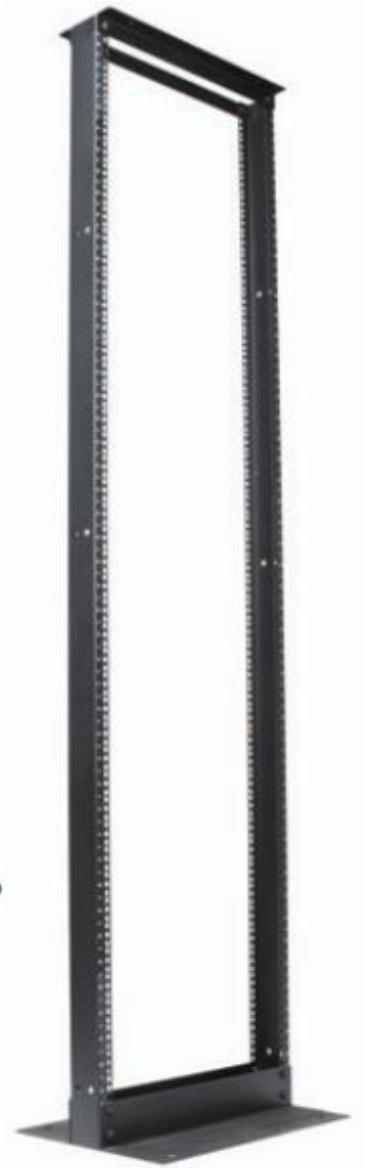

### Actual thickness

Vertical mounting rails	Upper beam	Lower beam
2.7	3.2	5.2

