
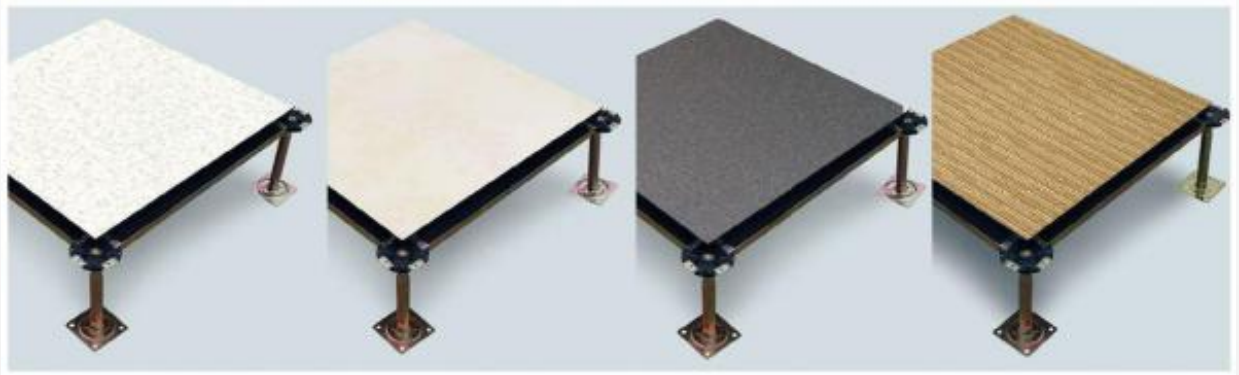
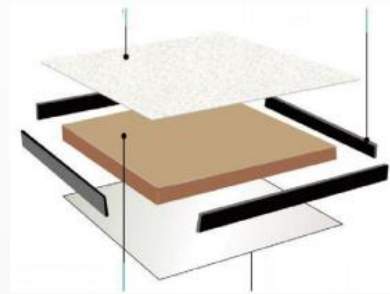


Characteristics

- 32/40mm high quality chipboard core with galvanized steel reinforcement underneath.
- Four pieces black PVC sealed the core.
- Covering:HPL,PVC,Steel,Carpet,Ceramic.
- Accessories die casting steel structure pedestal plastic gasket on top,height could be 80mm-1500mm,with or without aquare tube stringer steady connect the system.

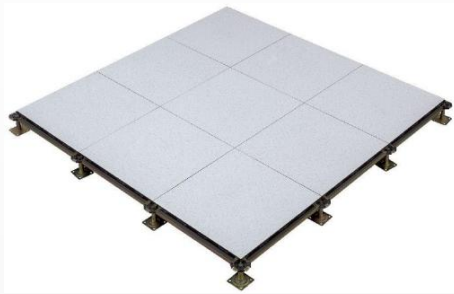

HPL/PVC Finish

Ceramic Finish

Marble/Granite Finish

Carpet Finish

Technical Specification

Type International	Conzentrated load			Impact load N	Ultimate load N	Uniform load N/m ²	Rolling load	
	LB	N	KG				10 times	10000 times
FS440	≥440	≥1960	≥200	≥295	≥5880	≥9720	≥1958	≥1566
FS662	≥662	≥2950	≥301	≥445	≥8850	≥12500	≥2948	≥2356
FS800	≥800	≥3550	≥363	≥538	≥11250	≥16100	≥3560	≥2670
FS1000	≥1000	≥4450	≥453	≥670	≥13350	≥23000	≥4450	≥3560
FS1250	≥1250	≥5560	≥567	≥670	≥16680	≥33000	≥5560	≥4450
FS1500	≥1500	≥6660	≥453	≥780	≥26690	≥43000	≥6670	≥5560